

Kellems® Wire Management Products
 PG and Metric Threaded Deluxe Cord Grips
 Deluxe Cord Grips

HUBBELL

Features

- Aluminum Fiting
- Stainless steel mesh is corrosion resistant
- Neoprene bushing is oil and watertight

Ordering Information

Description	Hub Size	UPC	Catalog Number
Straight Panzergerwinde Male Thread, Liquidtight	PG36	783585327792	074PG36028

Listings


UL Listed
 CSA Certified

Specifications

Strand	Galvanized Steel
Body	Aluminum
Nut	Aluminum
Bushing	Neoprene

Performance

Environmental	
Flammability	UL 94HB (Strand grip), UL 94V-2 (Fitting)
Hazardous Locations	Suitable for use in hazardous locations per Class I Div. 2, Class II Div. 1 & 2, Class III Div. 1 & 2 N.E.C
Operating Temperatures	-30°F to +240°F (-34°C to +115°C)
Wet Locations	Suitable for use in wet locations when used with a listed sealing ring between box and fitting

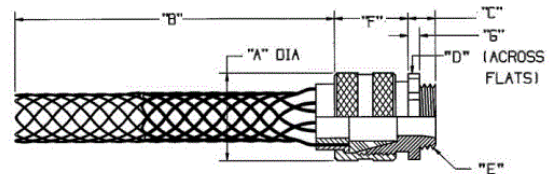

Online Resources

Customer Use Drawing
 eCatalog
 Installation Instructions

Dimensions in Inches (mm)

Hubbell Wiring Device-Kellems • Hubbell Incorporated (Delaware) • 40 Waterview Drive • Shelton, CT 06484

Phone (800) 288-6000 • Fax (800) 255-1031 • Specifications subject to change without notice.

