

**A**


### TYPE CCL

#### Features

- Electro-tin plated
- Sight hole
- Solid seamless tang
- Electrolytic copper
- Suitable for use in circuits rated 35KV or less, proper high voltage spacing and insulation techniques must be used
- For copper conductor only
- Rated to 90° C

#### Benefits

- Provides low contact resistance
- Visual inspection of proper cable insertion
- For performance and strength
- For high conductivity
- Application versatility

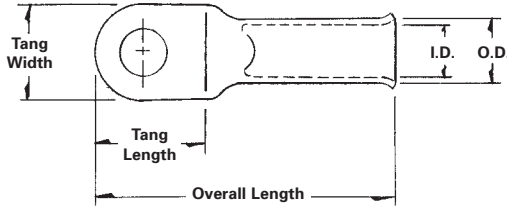

Catalog Number	Wire Size	Alt Wire Size	Bolt Size	Tang Length	Tang Width	Tang Thickness	Overall Length	Die Color Code	I.D.	O.D.
CCL-8-10	8 AWG	8 FLEX	#8-#10	0.579	0.445	0.071	1.201	RED	0.185	0.256
CCL-8-14	8 AWG	8 FLEX	1/4	0.579	0.445	0.071	1.201	RED	0.185	0.256
CCL-8-516	8 AWG	8 FLEX	5/16	0.724	0.598	0.059	1.276	RED	0.185	0.256
CCL-8-38	8 AWG	8 FLEX	3/8	0.724	0.598	0.059	1.276	RED	0.185	0.256
CCL-8-12	8 AWG	8 FLEX	1/2	0.858	0.752	0.059	1.480	RED	0.185	0.256

## Tooling Information

Catalog Number	Standard Stranded Conductor				Color Code
	ILSCO		Burndy	Thomas & Betts	
	MT-25 Hand Dieless No. of Crimps	ILC-10-N Die No. No. of Crimps	MY29-3 Hand Dieless No. of Crimps	TBM8	
CCL-8	(1)	(3)	(1)	(1)	Red

All wire sizes, unless noted otherwise, are American Wire Gauge (AWG)  
UL File E6207


### TYPE CCL

#### Features

- Electro-tin plated
- Sight hole
- Solid seamless tang
- Electrolytic copper
- Suitable for use in circuits rated 35KV or less, proper high voltage spacing and insulation techniques must be used
- For copper conductor only
- Rated to 90° C

#### Benefits

- Provides low contact resistance
- Visual inspection of proper cable insertion
- For performance and strength
- For high conductivity
- Application versatility

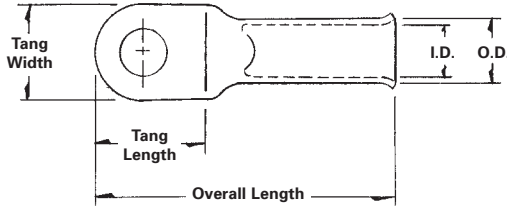

Catalog Number	Wire Size	Alt Wire Size	Bolt Size	Tang Length	Tang Width	Tang Thickness	Overall Length	Die Color Code	I.D.	O.D.
CCL-6-10	6 AWG	6 FLEX	#10	0.579	0.445	0.075	1.268	BLUE	0.232	0.299
CCL-6-14	6 AWG	6 FLEX	1/4	0.579	0.445	0.075	1.268	BLUE	0.232	0.299
CCL-6-516	6 AWG	6 FLEX	5/16	0.724	0.598	0.067	1.409	BLUE	0.232	0.299
CCL-6-38	6 AWG	6 FLEX	3/8	0.724	0.598	0.067	1.409	BLUE	0.232	0.299
CCL-6-12	6 AWG	6 FLEX	1/2	0.858	0.752	0.059	1.551	BLUE	0.232	0.299

## Tooling Information

Catalog Number	Standard Stranded Conductor				Color Code
	ILSCO		Burndy	Thomas & Betts	
	MT-25 Hand Dieless No. of Crimps	ILC-10-N Die No. No. of Crimps	MY29-3 Hand Dieless No. of Crimps	TBM8	
CCL-6	(1)	(2)	(1)	(1)	Blue

All wire sizes, unless noted otherwise, are American Wire Gauge (AWG)  
UL File E6207

**A**


### TYPE CCL

#### Features

- Electro-tin plated
- Sight hole
- Solid seamless tang
- Electrolytic copper
- Suitable for use in circuits rated 35KV or less, proper high voltage spacing and insulation techniques must be used
- For copper conductor only
- Rated to 90° C

#### Benefits

- Provides low contact resistance
- Visual inspection of proper cable insertion
- For performance and strength
- For high conductivity
- Application versatility

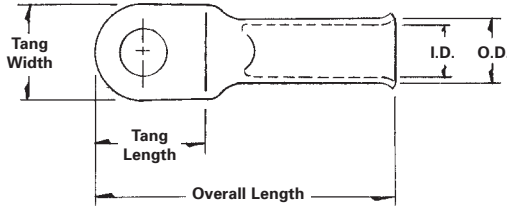

Catalog Number	Wire Size	Alt Wire Size	Bolt Size	Tang Length	Tang Width	Tang Thickness	Overall Length	Die Color Code	I.D.	O.D.
CCL-4-10	4 AWG	4 FLEX	#10	0.681	0.516	0.075	1.496	GRAY	0.283	0.362
CCL-4-14	4 AWG	4 FLEX	1/4	0.681	0.516	0.075	1.496	GRAY	0.283	0.362
CCL-4-516	4 AWG	4 FLEX	5/16	0.728	0.626	0.075	1.496	GRAY	0.283	0.362
CCL-4-38	4 AWG	4 FLEX	3/8	0.728	0.626	0.075	1.496	GRAY	0.283	0.362
CCL-4-12	4 AWG	4 FLEX	1/2	0.858	0.752	0.091	1.681	GRAY	0.283	0.362

## Tooling Information

Catalog Number	Standard Stranded Conductor				Color Code
	ILSCO		Burndy	Thomas & Betts	
	MT-25 Hand Dieless No. of Crimps	ILC-10-N Die No. No. of Crimps	MY29-3 Hand Dieless No. of Crimps	TBM8	
CCL-4	(1)	(2)	(1)	(2)	Grey

All wire sizes, unless noted otherwise, are American Wire Gauge (AWG)  
UL File E6207


### TYPE CCL

#### Features

- Electro-tin plated
- Sight hole
- Solid seamless tang
- Electrolytic copper
- Suitable for use in circuits rated 35KV or less, proper high voltage spacing and insulation techniques must be used
- For copper conductor only
- Rated to 90° C

#### Benefits

- Provides low contact resistance
- Visual inspection of proper cable insertion
- For performance and strength
- For high conductivity
- Application versatility

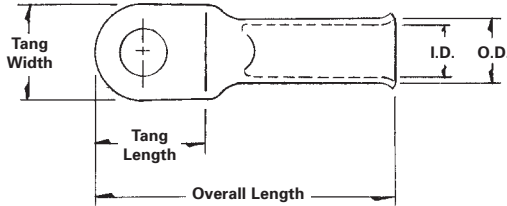

Catalog Number	Wire Size	Alt Wire Size	Bolt Size	Tang Length	Tang Width	Tang Thickness	Overall Length	Die Color Code	I.D.	O.D.
CCL-2-14	2 AWG	3 FLEX	1/4	0.728	0.598	0.094	1.606	BROWN	0.335	0.429
CCL-2-516	2 AWG	3 FLEX	5/16	0.728	0.598	0.094	1.606	BROWN	0.335	0.429
CCL-2-38	2 AWG	3 FLEX	3/8	0.728	0.598	0.094	1.606	BROWN	0.335	0.429
CCL-2-12	2 AWG	3 FLEX	1/2	0.858	0.752	0.102	1.752	BROWN	0.335	0.429
CCL-1-14	1 AWG	2 FLEX	1/4	0.858	0.650	0.098	1.720	GREEN	0.362	0.461
CCL-1-516	1 AWG	2 FLEX	5/16	0.858	0.650	0.098	1.720	GREEN	0.362	0.461
CCL-1-38	1 AWG	2 FLEX	3/8	0.858	0.650	0.098	1.720	GREEN	0.362	0.461
CCL-1-12	1 AWG	2 FLEX	1/2	0.858	0.752	0.102	1.831	GREEN	0.362	0.461

## Tooling Information

Catalog Number	Standard Stranded Conductor				Color Code
	ILSCO		Burndy	Thomas & Betts	
	MT-25 Hand Dieless No. of Crimps	ILC-10-N Die No. No. of Crimps	MY29-3 Hand Dieless No. of Crimps	TBM8	
CCL-2	(1)	(2)	(2)	(2)	Brown
CCL-1	(1)	(2)	(2)	(2)	Green

All wire sizes, unless noted otherwise, are American Wire Gauge (AWG)  
UL File E6207

**A**


### TYPE CCL

#### Features

- Electro-tin plated
- Sight hole
- Solid seamless tang
- Electrolytic copper
- Suitable for use in circuits rated 35KV or less, proper high voltage spacing and insulation techniques must be used
- For copper conductor only
- Rated to 90° C

#### Benefits

- Provides low contact resistance
- Visual inspection of proper cable insertion
- For performance and strength
- For high conductivity
- Application versatility

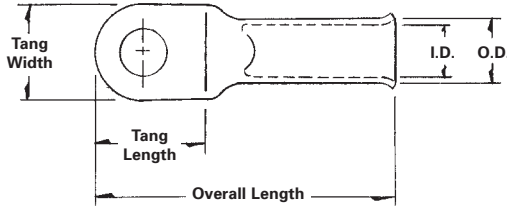

Catalog Number	Wire Size	Alt Wire Size	Bolt Size	Tang Length	Tang Width	Tang Thickness	Overall Length	Die Color Code	I.D.	O.D.
CCL-1/0-14	1/0 AWG	1 FLEX	1/4	0.791	0.713	0.110	1.831	PINK	0.406	0.516
CCL-1/0-516	1/0 AWG	1 FLEX	5/16	0.791	0.713	0.110	1.831	PINK	0.406	0.516
CCL-1/0-38	1/0 AWG	1 FLEX	3/8	0.791	0.713	0.110	1.831	PINK	0.406	0.516
CCL-1/0-12	1/0 AWG	1 FLEX	1/2	0.890	0.815	0.110	1.902	PINK	0.406	0.516
CCL-2/0-14	2/0 AWG	1/0 FLEX	1/4	0.929	0.815	0.110	2.055	BLACK	0.461	0.571
CCL-2/0-516	2/0 AWG	1/0 FLEX	5/16	0.929	0.815	0.110	2.055	BLACK	0.461	0.571
CCL-2/0-38	2/0 AWG	1/0 FLEX	3/8	0.929	0.815	0.110	2.055	BLACK	0.461	0.571
CCL-2/0-12	2/0 AWG	1/0 FLEX	1/2	0.929	0.815	0.110	2.055	BLACK	0.461	0.571

## Tooling Information

Catalog Number	Standard Stranded Conductor				Color Code
	ILSCO		Burndy	Thomas & Betts	
	MT-25 Hand Dieless No. of Crimps	ILC-10-N Die No. No. of Crimps	MY29-3 Hand Dieless No. of Crimps	TBM8	
CCL-1/0	(1)	(2)	(2)	(2)	Pink
CCL-2/0	(1)	-	(2)	(2)	

All wire sizes, unless noted otherwise, are American Wire Gauge (AWG)  
UL File E6207


### TYPE CCL

#### Features

- Electro-tin plated
- Sight hole
- Solid seamless tang
- Electrolytic copper
- Suitable for use in circuits rated 35KV or less, proper high voltage spacing and insulation techniques must be used
- For copper conductor only
- Rated to 90° C

#### Benefits

- Provides low contact resistance
- Visual inspection of proper cable insertion
- For performance and strength
- For high conductivity
- Application versatility

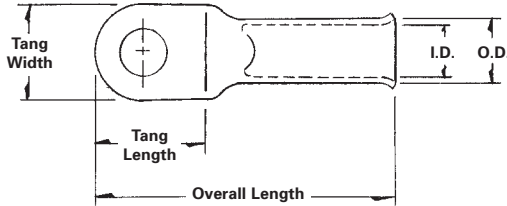

Catalog Number	Wire Size	Alt Wire Size	Bolt Size	Tang Length	Tang Width	Tang Thickness	Overall Length	Die Color Code	I.D.	O.D.
CCL-3/0-14	3/0 AWG	2/0 FLEX	1/4	0.969	0.894	0.118	2.161	ORANGE	0.512	0.630
CCL-3/0-516	3/0 AWG	2/0 FLEX	5/16	0.969	0.894	0.118	2.161	ORANGE	0.512	0.630
CCL-3/0-38	3/0 AWG	2/0 FLEX	3/8	0.969	0.894	0.118	2.161	ORANGE	0.512	0.630
CCL-3/0-12	3/0 AWG	2/0 FLEX	1/2	0.969	0.894	0.118	2.161	ORANGE	0.512	0.630
CCL-4/0-14	4/0 AWG	3/0 FLEX	1/4	1.071	1.035	0.130	2.382	PURPLE	0.591	0.720
CCL-4/0-516	4/0 AWG	3/0 FLEX	5/16	1.071	1.035	0.130	2.382	PURPLE	0.591	0.720
CCL-4/0-38	4/0 AWG	3/0 FLEX	3/8	1.071	1.035	0.130	2.382	PURPLE	0.591	0.720
CCL-4/0-12	4/0 AWG	3/0 FLEX	1/2	1.071	1.035	0.130	2.382	PURPLE	0.591	0.720

## Tooling Information

Catalog Number	Standard Stranded Conductor				Color Code
	ILSCO		Burndy	Thomas & Betts	
	MT-25 Hand Dieless No. of Crimps	ILC-10-N Die No. No. of Crimps	MY29-3 Hand Dieless No. of Crimps	TBM8	
CCL-3/0	(1)	-	(2)	(2)	
CCL-4/0	(2)	-	(2)	(2)	

All wire sizes, unless noted otherwise, are American Wire Gauge (AWG)  
UL File E6207